Palm grip B 1

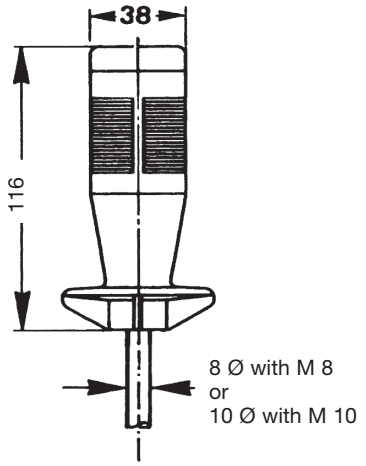

Type B1

The palm grip B 1 is an actuating element for our multi-axis and single-axis controller. It can also be used as an actuating element with hydraulic drives. Push buttons, rocker switches, e.t.c., can also be fitted to suit appropriate requirements. These devices have micro changeover contacts.

The palm grip has a highly flexible cable 4 (8) x 0,25 mm² x 450 mm long.

The mounting piece for the drive rod can be supplied with a tapped hole M 8 or M 10 (standard = M 10).

The palm grip B 1 is made of PA plastic and is black in colour.

Contact complement	**2 A**	**250 V**	**AC 15 /**	**3 A**	**24 V**	**DC 13**
or	**0,5 A**	**250 V**	**AC 15 /**	**1,5 A**	**24 V**	**DC 13**

Micro change over contacts

Permissible ambient temperature	Operating -40°C to +60°C Storage -50°C to +80°C
Climate resistance	
Damp heat constant	IEC 60068-2-78
Damp heat cyclic	IEC 60068-2-30
Degree of protection front	IP 54 IEC/EN 60529

Pos.					Contact-complement	Weight gramm	Type	Price EURO
1		Without built in		KBAD / 22		100	B 1	
2 3 4		Rocker switch top tip-0-tip Rocker switch top tip-0-rest Rocker switch top rest-0-rest	T-0-T T-0-R R-0-R	installed Pos. 1 installed Pos. 1 installed Pos. 1	KBAD / 18	2 change over contact 3 A 24 V DC 13	120	B 1 W	
5		Rocker switch top tip-0-tip with push button side	T-0-T	installed Pos. 1 installed Pos. 3	KBAD / 29	2 change over contact 3 A 24 V DC 13 1 change over contact 1,5 A 24 V DC 13	130	B 1 WD	
6		Rocker switch top tip-0-tip with 2 push button side	T-0-T	installed Pos. 1 installed Pos. 2+3	KBAD / 67	2 change over contact 3 A 24 V DC 13 2 change over contact 1,5 A 24 V DC 13	140	B 1 W2D	
7 8		Push button top with mechanical operation Push button top		installed Pos. 1 installed Pos. 1	KBAD / 27 KBAD / 25	1 change over contact 1,5 A 24 V DC 13	120 100	B 1 T B 1 D	
9 10		Push button top with 1 push button side Push button top with 2 push button side		installed Pos. 1 installed Pos. 2 installed Pos. 2+3	KBAD / 20	2 change over contact 1,5 A 24 V AC 13 3 change over contact 1,5 A 24 V DC 13	120 130	B 1 2D B 1 3D	
11 12 13		1 push button side 2 push button side 3 push button side		installed Pos. 1 installed Pos. 2 installed Pos. 3	KBAD / 31	change over contact 1,5 A 24 V DC 13	110 120 130	B 1 D B 1 2D B 1 3D	
14		Push button top with Rocker switch side tip-0-tip (protection IP 41)	T-0-T	installed Pos. 1 installed Pos. 2	KBAD / 75	1 change over contact 1,5 A 24 V DC 13 2 change over contact 1,5 A 24 V DC 13	120	B 1 DW	
15 16 17		Lever switch side 0-tip mechanical operation Lever switch side 0-tip 1 contact Lever switch side 0-tip 2 contacts			KBAD / 586 KBAD / 54 KBAD / 54	change over contact 3 A 24 V DC 13	150 120 130	B 1 K B 1 KD B 1 K2D	
21 22		Cable 4 or 8 x 0,25 mm² x 450 mm long wired included Pos. 1-17 Additional price per metre cable 4-pole Additional price per metre cable 8-pole							