



The Palm Grip B34 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm<sup>2</sup>, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.


### Technische Daten

|                       |                                     |
|-----------------------|-------------------------------------|
| Operating temperature | -40°C to +85°C                      |
| Degree of protection  | Control element up to IP67          |
| Contact complement    | 1,5A 24 V DC 13 (*1 0,1A 24 V DC13) |



|                                   | B34L  | Example<br>-2D | W | S12 | -X |
|-----------------------------------|---|----------------|---|-----|----|
| <b>Basic unit</b>                 |   |                |   |     |    |
| B34L                              | Palm Grip left  |                |   |     |    |
| B34R                              | Palm Grip right   |                |   |     |    |
| <b>Digitale actuating element</b> |   |                |   |     |    |
| D                                 | Push Button KDA21 *1<br>Colour: red, black, yellow, green, blue, white, orange  |                |   |     |    |
| HD                                | Hall-Push Button (see page 158)   |                |   |     |    |
| W                                 | Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white<br>Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R   |                |   |     |    |
| K                                 | Lever switch  |                |   |     |    |
| SE                                | Sensor Button capacitive with external control electronics  |                |   |     |    |
| S                                 | Sensor Button capacitive without external control electronics<br>(Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with interfaces E3xx + E4xx +E6xx + E7xx + E907) |                |   |     |    |
| <b>Analog actuating element</b>   |   |                |   |     |    |
| S12                               | Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 153)  |                |   |     |    |
| S16                               | Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 156)  |                |   |     |    |
| <b>Special model</b>              |   |                |   |     |    |
| X                                 | Special / customer specified  |                |   |     |    |

**B34**

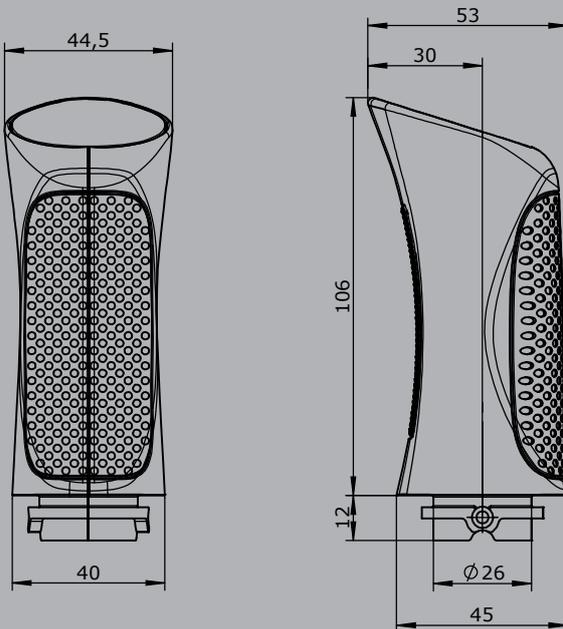

Edition:  
 Push button installed Pos. 1-3  
 Rocker switch installed Pos. 4-5  
 Lever switch installed Pos. 6  
 Position rocker switch or push button left hand ( )

Edition:  
 Push button installed Pos. 1-3,4,5  
 Lever switch installed Pos. 6

