

# Remote Operator Station ROS

# GESSMANN®

The ROS1 is designed according to ergonomic guidelines and meets very high comfort requirements. The height-adjustable table system ensures a comfortable posture and a healthy working position. The two attached C1 control desks can be adjusted horizontally and optionally in inclination.

These can be individually equipped with additional Gessmann components.

The monitor holder can be adjusted in height (0-200 mm) and thus ensures an optimum view of the monitors.

A distributor housing is included in the scope of delivery

Colors:

Table top gray RAL 7024

Metal parts white RAL 9016

Lighting Stripe red RAL 3018



		ROS12	/	C1L / C1R	-	A1	-	M1	-	L1	/	KLV	/	X
<b>Basic unit</b>														
ROS 11	Remote Operator Station 1400mm x 1200mm													
ROS 12	Remote Operator Station 1800mm x 1400mm													
<b>Control Console</b>														
C1L	Control Console C1 left													
C1R	Control Console C1 right													
<b>Options</b>														
A1	Tilt and distance adjustment of the control consoles													
M1	Separate height adjustment for each monitor													
L1	Logo on the outside of the distributor housing													
<b>Attachments</b>														
	Gooseneck microphone													
	Ollin Laptop/ tablet holder													
	Ollin movable monitor arm													
	Honeywell LED light													
	Fan for distribution box													
	Office chair KAB Controller Heavy Duty Leather													
	Office chair KAB Controller Leather Trim													
	Office chair KAB Controller Fabric													
<b>Wiring</b>														
KL	Without wiring, but terminal block built in each terminal													
KLV	On terminal block 4 mm with single wire 1 mm² each terminal													
KLV	On SPS (SPS provision) with single wire 1 mm² each terminal													
KLVA	External wiring single wire highly flexible 1,5 mm², 5 m long each terminal													
	<i>Additional-/ reduction price per meter</i>													
<b>Special model</b>														
X	Special painting													
X	Special / customer specified													

## Dimension (mm)






**A:** Min 660, Max 1250

**B:** Min 555, Max 755

**C:** Min 1215, Max 2005

**D:** Min 525, Max 635

(shown with generic 20" monitors)

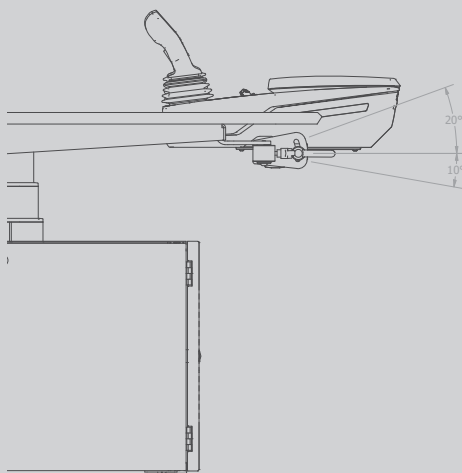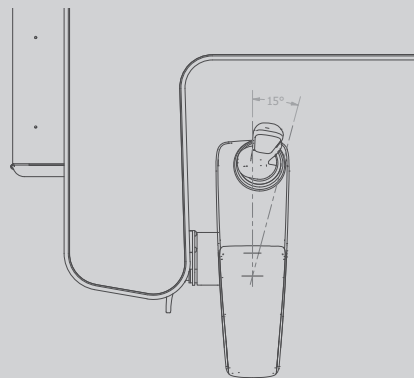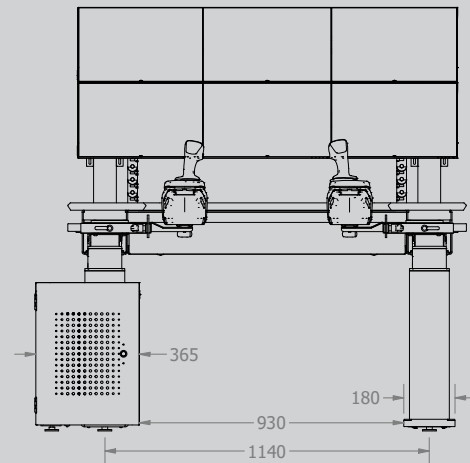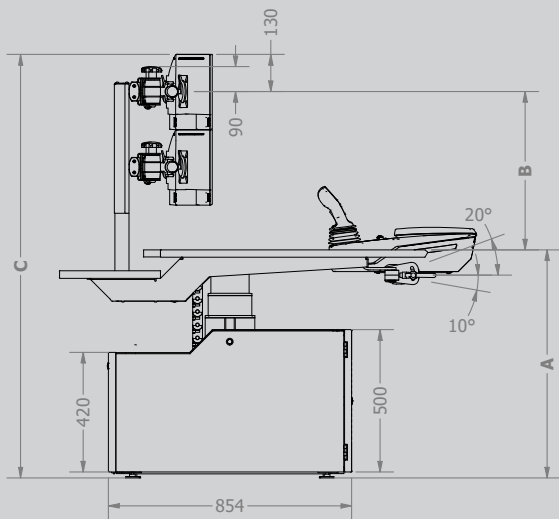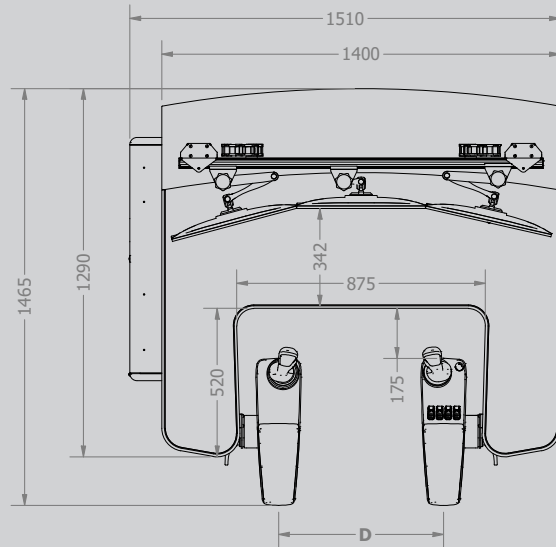

Technical details may vary based on configuration or application! Technical data subject to change without notice!

## Dimension (mm)

A: Min 660, Max 1250

B: Min 555, Max 755

C: Min 1390, Max 2180

D: Min 525, Max 635

(shown with generic 27" monitors)

