

# Palm Grip B10



**GESSMANN®**

The Palm Grip B10 has different equipment options for many requirements. It is compatible with our Double-handle controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 10 mm.


### Technical data

|                       |                                    |
|-----------------------|------------------------------------|
| Operating temperature | -40°C to +85°C                     |
| Degree of protection  | Control element up to IP67         |
| Contact complement    | 1,5A 24 V DC13 (*1 0,1A 24 V DC13) |




|                                              |                                                        | Example |     |   |   |    |
|----------------------------------------------|--------------------------------------------------------|---------|-----|---|---|----|
|                                              |                                                        | B10AL   | -3D | W | V | -X |
| Basic unit                                   |                                                        |         |     |   |   |    |
| B10L                                         | Palm Grip left                                         |         |     |   |   |    |
| B10R                                         | Palm Grip right                                        |         |     |   |   |    |
| B10AL                                        | Palm Grip left with growing part                       |         |     |   |   |    |
| B10AR                                        | Palm Grip right with growing part                      |         |     |   |   |    |
| Digital actuating element                    |                                                        |         |     |   |   |    |
| D                                            | Push Button KDA21 *1                                   |         |     |   |   |    |
|                                              | Colour: red, black, yellow, green, blue, white, orange |         |     |   |   |    |
| HD                                           | Hall-Push Button (see page 160)                        |         |     |   |   |    |
| W*                                           | Rocker switch T-0-T                                    |         |     |   |   |    |
| W*                                           | Rocker switch 0-T                                      |         |     |   |   |    |
| W*                                           | Rocker switch R-0-T                                    |         |     |   |   |    |
| W*                                           | Rocker switch R-0-R                                    |         |     |   |   |    |
| W*                                           | Rocker switch 0-R                                      |         |     |   |   |    |
| W*                                           | Rocker switch R-R                                      |         |     |   |   |    |
| *Only possible with version with attachment! |                                                        |         |     |   |   |    |
| V                                            | Vibration pulse 24V DC ED 100%                         |         |     |   |   |    |
| Special model                                |                                                        |         |     |   |   |    |
| X                                            | Special / customer specified                           |         |     |   |   |    |

## B10

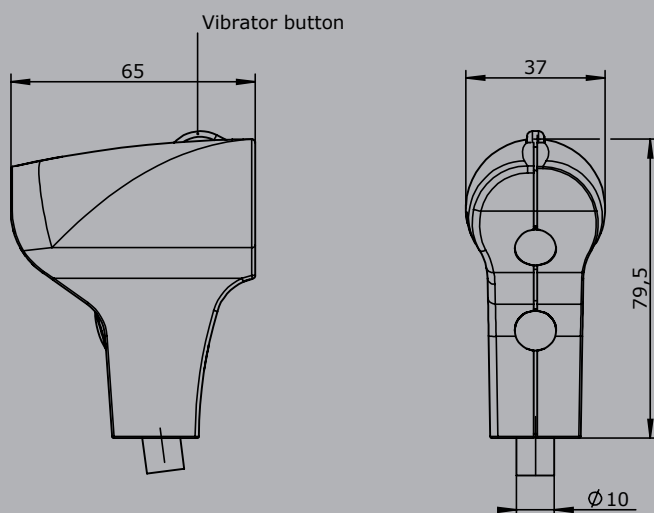

## B10A

Edition installed left:  
Push button installed Pos. 1,2,3  
Rocker switch

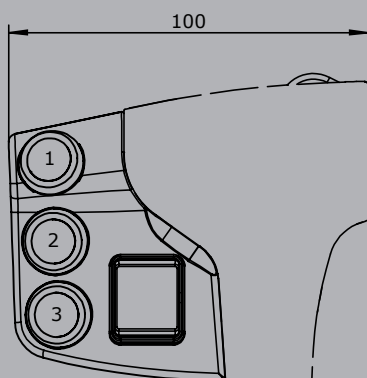

Edition installed right:  
Push button installed Pos. 4,5,6  
Rocker switch

