



The Palm Grip B23 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data



Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	1,5A 24 V DC13 (*1 0,1A 24 V DC13)



		B23R	-2D	W	V21	-X
Basic unit						
B23L	Palm Grip left					
B23R	Palm Grip right					
Digital actuating element						
D	Push Button KDA21 *1					
	Colour: red, black, yellow, green, blue, white, orange					
HD	Hall-Push Button (see page 160)					
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white					
	Mechanical functions: T-O-T, O-T, R-O-T, R-O-R, O-R, R-R					
Analog actuating element						
S12	Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 155)					
S16	Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 158)					
V21	Mini-Joystick, output 0,5...2,5...4,5 V inverse dual (see page 144)					
HK	Hall-Cross Switch (see page 152)					
Special model						
X	Special / customer specified					


B23R

Push button installed Pos. 1 - 8

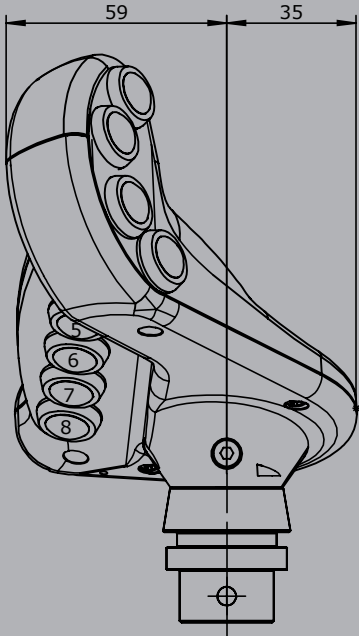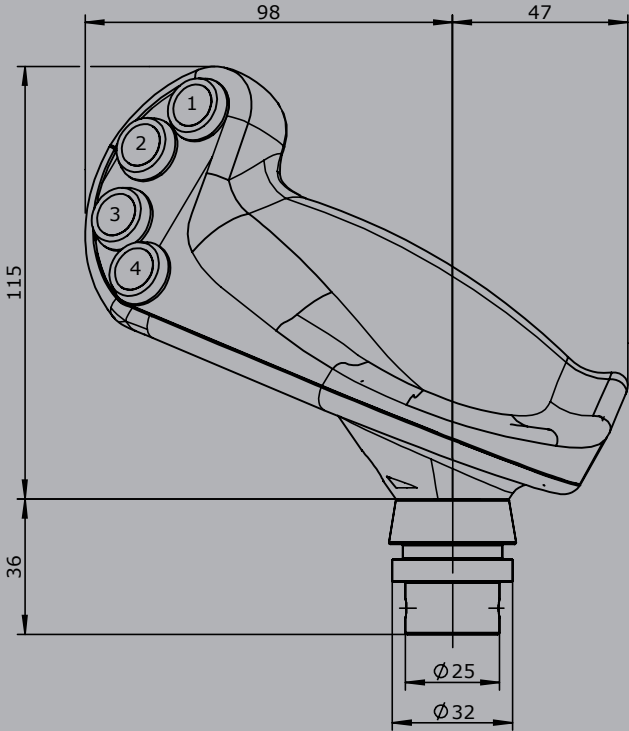

B23L

Push button installed Pos. 1 - 8

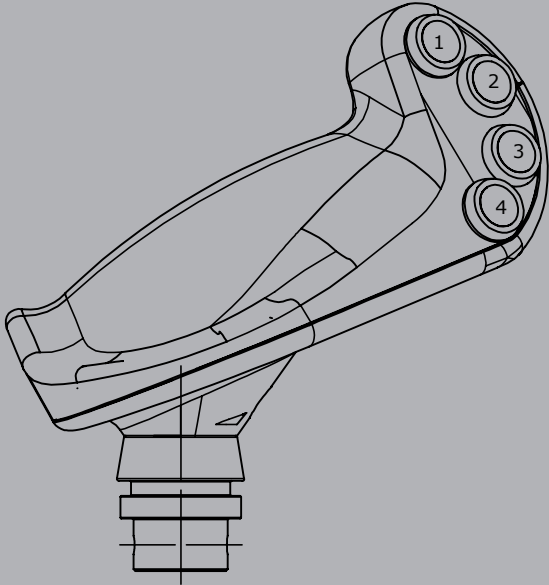

Edition :
Multi-axis controller V21
Push button installed Pos. 5,6,7,8

