



The Palm Grip B28 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 10 mm (standard).

Technical data


Operating temperature	-40°C to +85°C
Degree of protection	Up to IP54




Example

	B28	-2D	SE	-X
Basic unit				
B28	Palm Grip			
Digital actuating element				
D	Push Button (1,5A 24 V DC13) Colour: red, black, yellow, green, blue, grey			
SE	Sensor Button capacitive with external control electronics			
S	Sensor Button capacitive without external control electronics (Consistent with V85 / VV85 with interface E1xx to E7xx, E907 and V25/V27 with interfaces E3xx + E4xx + E6xx + E7xx + E907)			
Special model				
X	Special / customer specified			

Edition:
Push button installed
Pos. 1,3,4,6,7,8
Sensor button function on left or right available

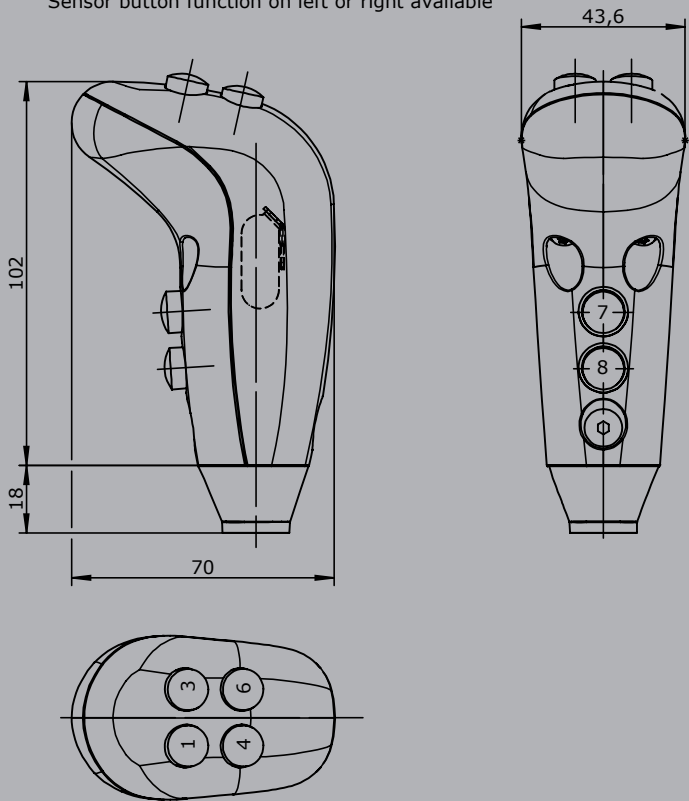

Edition:
Push button installed
Pos. 2,5,7,8
Sensor button function on left or right available



Edition:
Push button installed
Pos. 7,8,9,10
Sensor button function on left or right available

