

Gear Limit Switch

GE1 / GE2



GESSMANN®

The Gear Limit Switch GE1 / GE2 is a rugged switching device designed for hoisting applications. The modular micro changeover contacts with positive opening operation. The device is programmed by means of stepless adjustment of double cam discs, which can be provided from 18° to 192° contact discs according to the switching program required. The type GE 1 (standard) includes a double cam disc conjointly lockable. The type GE 2 (standard) includes a double cam disc conjointly lockable.

Technical data


Mechanical life GE1/GE2	10 million operating cycles
Operation temperature	-40°C to +85°C
Degree of protection	IP65
Colour	RAL 7032 pebble grey
Contact complement	2 A 250 V AC oder 3 A 24 V DC 13



		GE 1	-10	-4	-P	-U7	-P	-18	-30	-60	-90	-X
Basic unit												
GE1	Gear Limit Switch GE1 with mounting flange											
GE2	Gear Limit Switch GE2 with mounting flange											
Gearing												
Ratios:	2:1 to 10:1 example: 10:1 => 10											
	11:1 to 20:1											
	21:1 to 40:1											
	41:1 to 80:1											
	81:1 to 160:1											
	161:1 to 320:1											
Limit switch												
2	2 contacts											
3	3 contacts											
4	4 contacts											
5	5 contacts											
6	6 contacts											
7	7 contacts											
8	8 contacts											
9	9 contacts											
10	10 contacts											
11	11 contacts											
12	12 contacts											
13	13 contacts											
14	14 contacts											
15	15 contacts											
16	16 contacts											
(P)	Possibility of mounting potentiometer (Gessmann-types)											
P	Potentiometer											
		P451	PW70	0,5 kOhm	I max. 30 mA							
		P452	PW70	1 kOhm	I max. 30 mA							
		P453	PW70	2 kOhm	I max. 30 mA							
		P454	PW70	5 kOhm	I max. 30 mA							
		P455	PW70	10 kOhm	I max. 30 mA							
		More potentiometers on request!										

Technical details may vary based on configuration or application! Technical data subject to change without notice!

	GE 1	-10	-4	-P	-U7	-P	-18	-30	-60	-90	-X
Aluminium housing											
U5	U17/13 170 x 130 mm (max. 8 contacts GE 1)										
U6	U16/16 160 x 160 mm (max. 12 contacts GE 1/ max. 6 contacts GE 2)										
U7	U16/20 160 x 200 mm (max. 16 contacts GE 1/max. 10 v GE 2)										
U8	U16/26 160 x 260 mm (max. 16 contacts GE2)										
U9	U16/35 160 x 350 mm										
Program-disc											
Following program-discs are available :											
18°, 24°, 30°, 36°, 45°, 60°, 75°, 90°, 110°, 120°, 176°, 192°											
Example:											
Contact 1: program-discs pair 18° (adjustment range 18°-36°)											
Contact 2: program-discs pair 30° (adjustment range 30°-60°)											
Contact 3: program-discs pair 60° (adjustment range 60°-120°)											
Contact 4: program-discs pair 90° (adjustment range 90°-180°)											
Contact n:											
Illustration											
The programm-discs are infinitely adjustable within 360°											
Special model											
X	Special / customer specified										

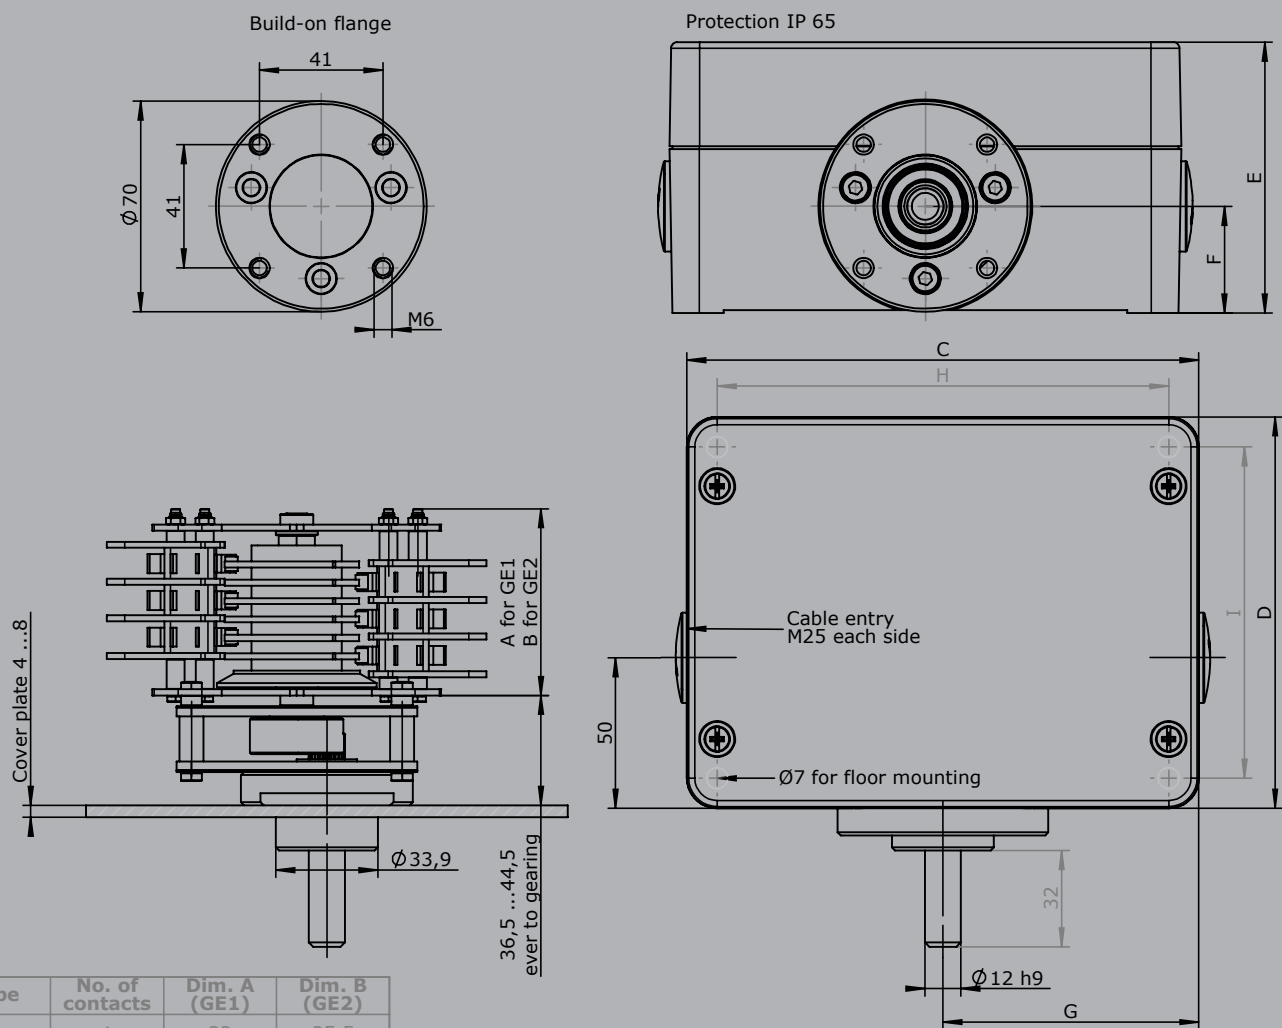

Type	No. of contacts	Dim. A (GE1)	Dim. B (GE2)
1	1	32	35,5
2	2	38,5	42
3	3	44,5	48
4	4	50,5	54
5	5	56,5	60
6	6	63	66,5
7	7	69	72,5
8	8	75	78,5
9	9	81	84,5
10	10	87	90,5
11	11	93	96,5
12	12	99	102,5
13	13	105,5	109
14	14	111,5	115
15	15	117,5	121
16	16	123,5	127

Type	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H	Dim. I
U17/13	170	130	90	35,5	75	150	110
U16/16	160	160	91	45	70	140	140
U16/20	160	200	100	45	70	140	180
U16/26	160	260	91	45	70	140	240
U16/35	160	350	100	45	70	140	330