

Control Unit KST 19 swiveling



GESSMANN®

The KST19 is an ergonomically designed swiveling control chair which provides a high degree of comfort.

Equipment boxes:

The equipment boxes are vertically and horizontally adjustable. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is carried out through a cross-member in the traverse. (Terminal block)

Driver's Seat:

As standard the KST19 is fitted with a KFS10 seat. The seat itself is fitted with a pneumatic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The swivel base is zero-clearance bearing and can be locked either by a detent (standard) in 3° steps or stepless by a friction brake.

Surface treatment:

Base coat and textured varnish


Standard colour RAL 7035 light grey, equipment boxes RAL 7016 anthracite



		Example														
		KST19	-U1	-M1	-F3	-LK	/	KFS 10	/	V85	/	V85	/	KL	/	X
Basic unit																
KST19	Control Unit with equipment boxes															
Base unit																
U1	Swiveling 90° left, 180° right with friction brake															
U2	Swiveling 90° left, 180° right with detent incl. 2-step release (standard)															
U4	Non swiveling															
Attachments																
M1	Monitor mounting with monitor housing															
M2	Monitor mounting with monitor mounting bracket															
M3	Monitor mounting without monitor housing/ -mounting bracket															
M4	Monitor mounting (Monitor < 5 kg) with monitor housing															
M5	Monitor mounting (Monitor < 5 kg) with mounting adapter															
F3	Footrest KBF/864															
F4	Glass footrest version															
H	Heater 2 x 1 kW with ventilator															
LK	Plate for horizontal manual adjustment for control units +/- 250 mm															
Driver's Seat																
KFS10*	(Included in the delivery!)															
*Description see Driver's Seat page 296																

Technical details may vary based on configuration or application! Technical data subject to change without notice!

		KST19	-U1	-M1	-F3	-LK	/	KFS10	/	V85	/	V85	/	KL	/	X
Mounting for equipment boxes																
V...	Multi-Axis Controller (see section joysticks)															
S...	Single-Axis Controller (see section joysticks)															
D...	Double-Handle Controller (see section joysticks)															
N...	Control-Switch (see page 120)															
...	More command and indicating devices (see page 144 and 289)															
Wiring																
KL	Without wiring, but terminal block built in each terminal															
KL V	On terminal block 4 mm ² with single wire 1 mm ² each terminal															
KL V	On SPS (SPS provision) with single wire 1 mm ² each terminal															
KLVA	External wiring single wire highly flexible 1,5 mm ² , 5 m long each terminal															
Special model																
X	Special / customer specified															
X ²	Special painted															
Option																
Radio remote control system																

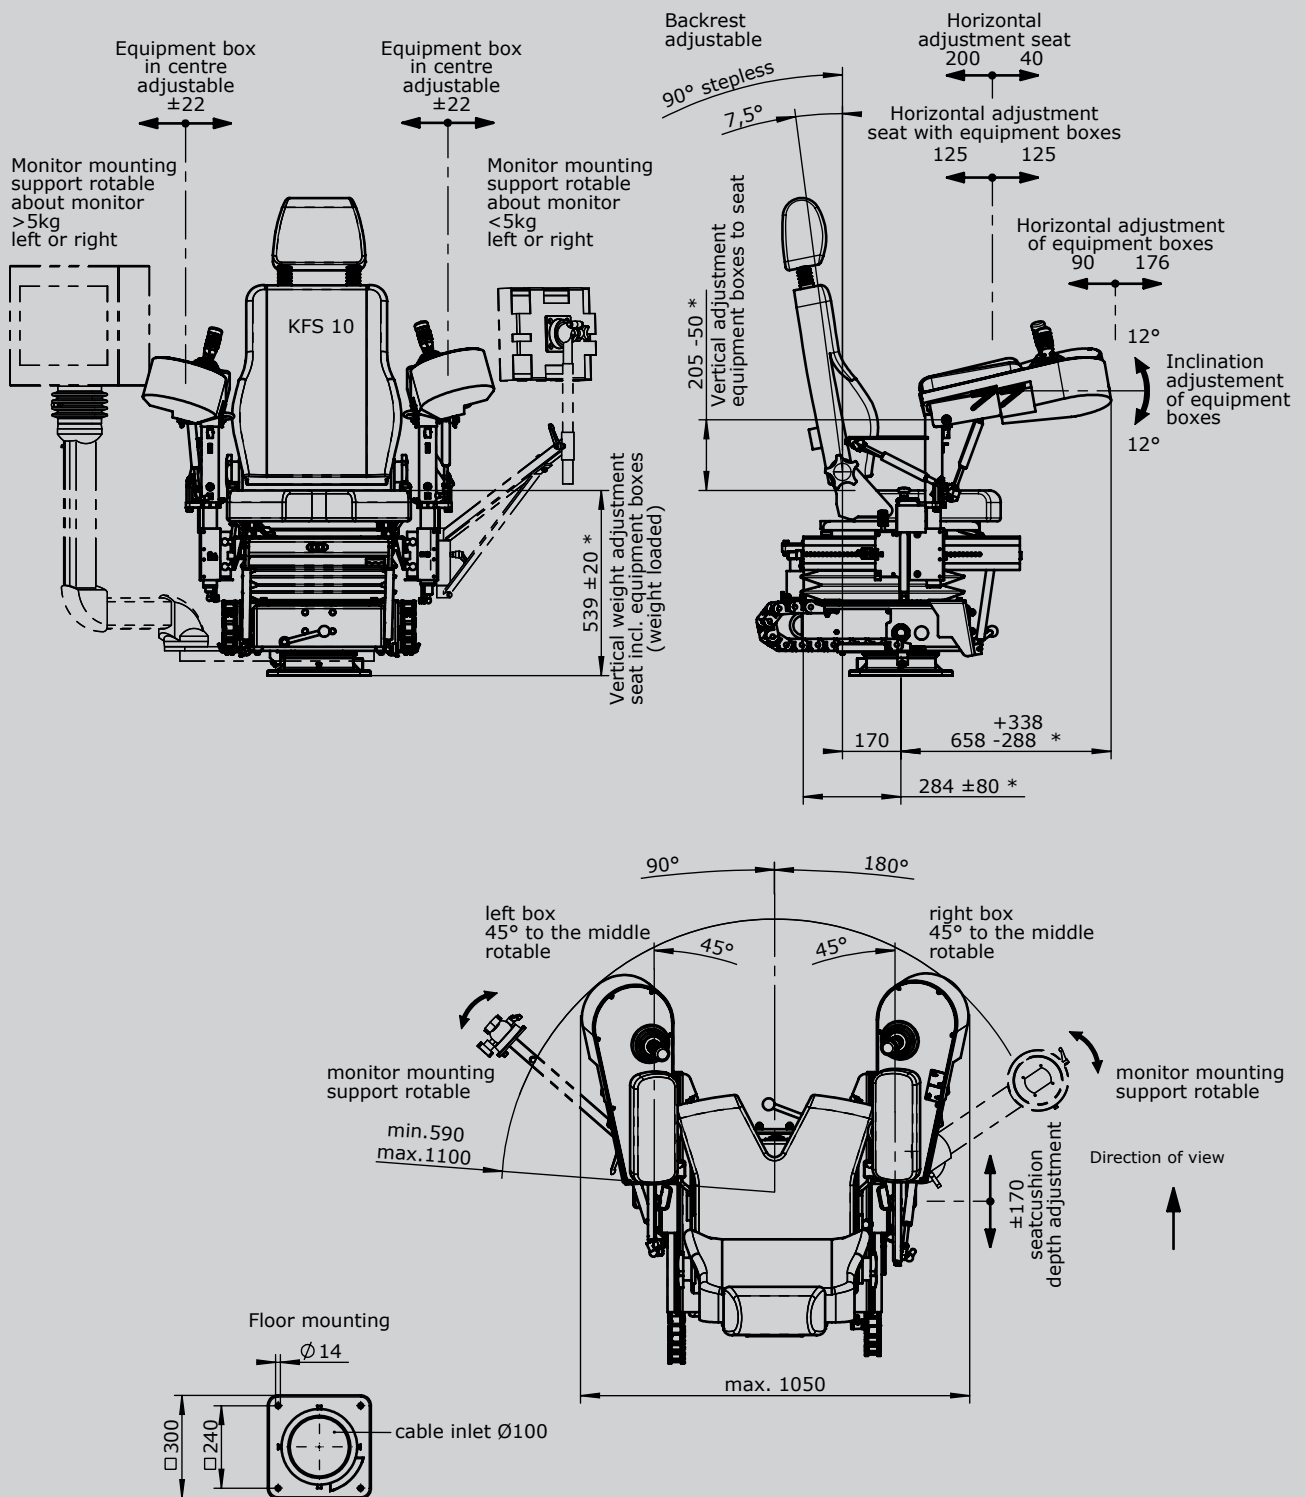

* adjustable