

Foot Pedal

P7 / PP7



The Foot Pedal P7 / PP7 is a rugged switching devices for footing applications. The Foot Pedal is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



Technical data

Mechanical life P7	6 million operating cycles
Mechanical life PP7	10 million operating cycles
Operation temperature	-40°C to +85°C
Degree of protection P7	IP54
Degree of protection PP7	IP65
Colour	RAL 7032 pebble-grey



		P7	-1 Z	Example P	-A01	P124	-X
Basic unit							
P7	Foot Pedal						
	Reinforced version						
PP7	Foot Pedal						
Detent							
	Without						
R2	0-2						
R3	0-3						
R4	0-4						
R11	1-0-1						
R22	2-0-2						
Direction 1-2							
1	1 contact	Standard contact - Arrangement see page 129					
2	2 contacts	z.B.					
3	3 contacts	MS11	A01				
4	4 contacts*	MS12	A02				
5	5 contacts*	MS13	A03				
6	6 contacts*	MS14	A04				
	*Only possible without potentiometer!	MS21	A05				
		A99 contact - arrangement according customer request					
Z	Spring return						
R	Friction brake						
(P)	Mounting options for potentiometer and encoder (Gessmann-types)						
P	Potentiometer	P121	T374	0,5 kOhm	I max. 1 mA		
		P122	T374	1 kOhm	I max. 1 mA		
		P123	T374	2 kOhm	I max. 1 mA		
		P124	T374	5 kOhm	I max. 1 mA		
		P125	T374	10 kOhm	I max. 1 mA		
		More potentiometers on demand!					
Special model							
X	Special / customer specified						

Technical details may vary based on configuration or application! Technical data subject to change without notice!

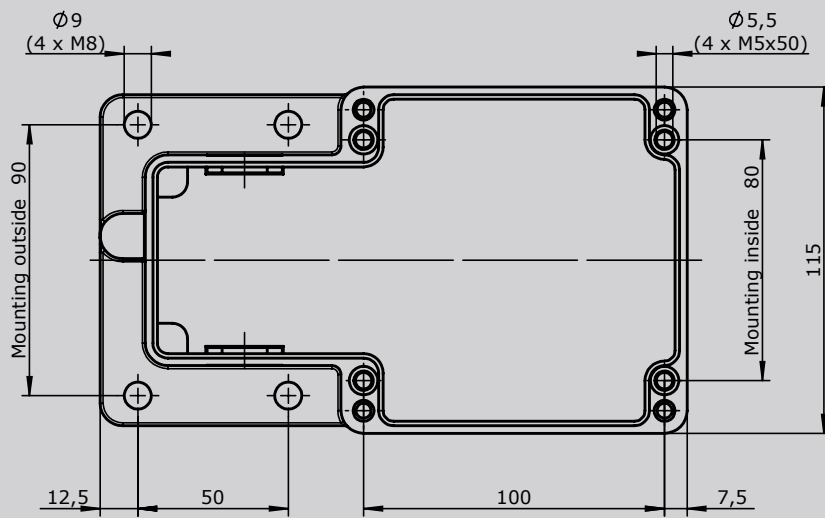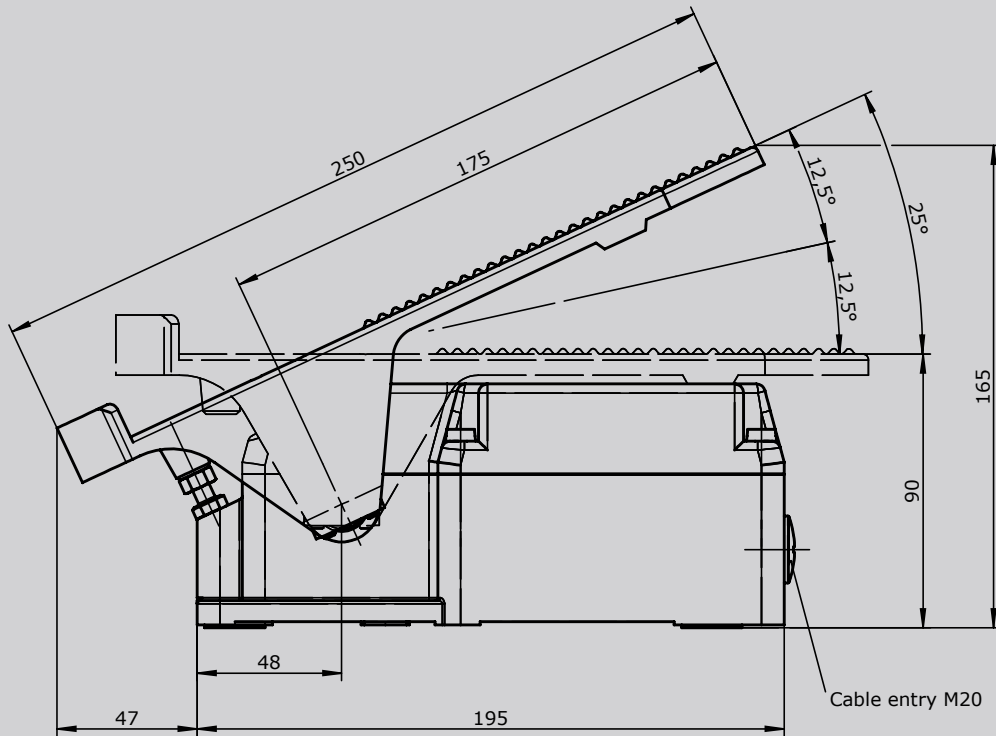

Technical details may vary based on configuration or application! Technical data subject to change without notice!