Palm grip B 4

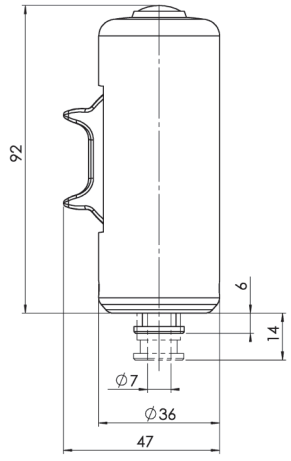

Type B4DPA11-…

The palm grip B 4 is an actuating element for our multi-axis controller V 10, V 11, V 14.
It can also be used as an actuating element for hydraulic drives.
Push buttons, rocker switches, e.t.c., can also be fitted to suit appropriate requirements.
The drive with potentiometer PA 11 realised the direction 11-12 (3. axis) on our multi-axis controllers.

The palm grip has a highly flexible single wire 0,1 mm^2 x 450 mm long.

The mounting piece for the drive rod can be supplied with a tapped hole 8 mm.
The palm grip B 4 is made of PA plastic and is black in colour.

Contact complement 0,5 A 110 V AC 15 res. 1,5 A 24 V DC 13
I min > 0,2 mA 2 V DC 12 Gold plated for max. load of 0,12 Watt (standard)

Permissible ambient temperature	Operating -40°C to +60°C Storage -50°C to +80°C
Climate resistance	
Damp heat constant	DIN IEC 68 part 2-3
Damp heat cyclic	DIN IEC 68 part 2-30
Degree of protection front	IP 65 IEC 529 DIN 40050

Pos.				Weight gramm	Type	Price EURO
1	Palm grip with mounting piece for control-handle			120	B 4	
2 3 5 6 10	Push button 1 NO 100 mA 24 V DC 13			20	D	
11	Drive with potentiometer PA 11 actuating by rocker wheel with spring return in the centre position 1 conductive-plastic potentiometer T 394 with centre tap Linear 10^7 switching cycles resistance 2 x 5 kOhm 0,5 Watt wiper current max. 1 mA 2 direction-contacts			90	PA 11	
30 31 32 33						